

# dealer information




## Front PTO 2-gear 1000/1000 Eco manually switchable (HTD)

**Front PTO manually adjustable (by hand); switchable HTD**

**technical data 1000/1000Eco:**

- ↗ gear ratio i = 1,88
- ↗ gear ratio i = 1,56
- ↗ axle shaft displacement 124mm
- ↗ shaft speed 1000 rpm
- ↗ max. continuous power 100 kW / 136 PS, torque 960 Nm
- ↗ max. PTO power 147 kW / 200 PS, torque 1400 Nm
- ↗ switchable clutch – electrohydraulically actuated
- ↗ gear ratio choice, done manually by hand (with lever at gearbox)
- ↗ compact size, only +48mm compared to Sauter HT gearbox

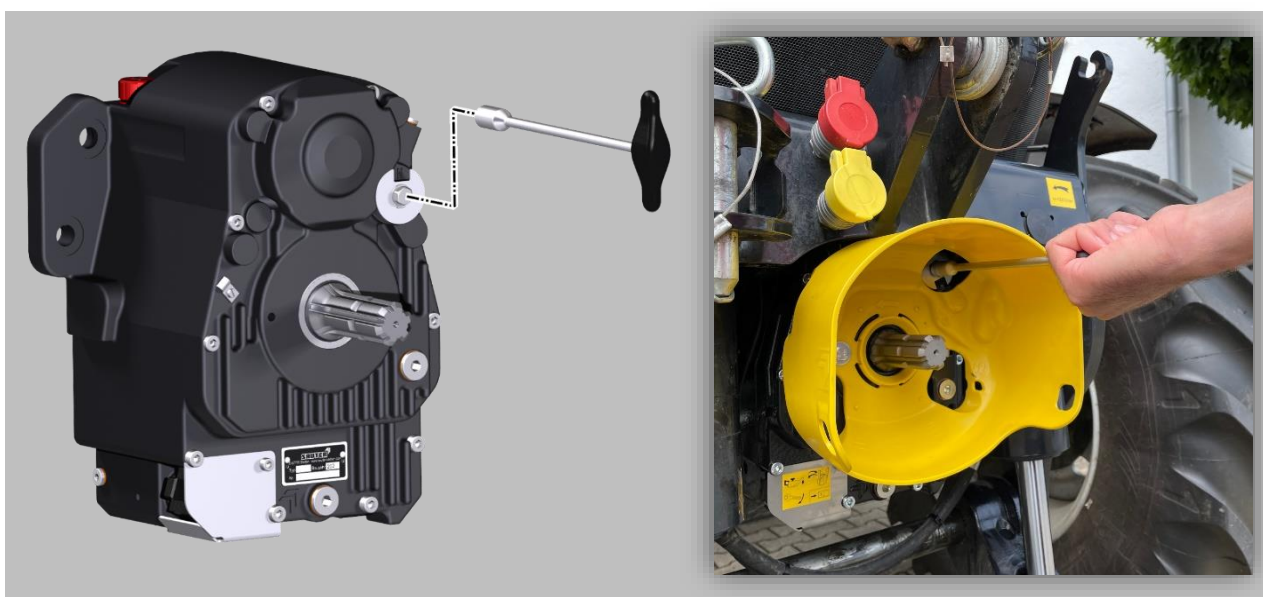

SAUTER – we like to move it !



subject to design changes, errors and mistakes excepted !

Hans Sauter GmbH • Auerbachweg 13 • D-87778 Stetten • Tel.: +49 8261 / 75994-0 • Fax: 75994-20  
[www.sauter-stetten.com](http://www.sauter-stetten.com) • Instagram: [sauter\\_frontsysteme](https://www.instagram.com/sauter_frontsysteme)